


45° OUTSIDE CORNER RADIAL SOLUTION (41" AND 28" SERIES)


MINIMUM RADIUS AND
OFFSET FOR BOTTOM ROW

NUMBER OF COURSES	HEIGHT OF BLOCKS	RADIUS FROM FACE OF BLOCK	OFFSET
1	1'-6"	14'-6"	± 14 ³ / ₈ "
2	3'-0"	14'-8"	± 14 ¹ / ₂ "
3	4'-6"	14'-10"	± 14 ⁵ / ₈ "
4	6'-0"	15'-0"	± 14 ⁷ / ₈ "
5	7'-6"	15'-2"	± 15"
6	9'-0"	15'-4"	± 15 ¹ / ₈ "
7	10'-6"	15'-6"	± 15 ³ / ₈ "
8	12'-0"	15'-8"	± 15 ¹ / ₂ "
9	13'-6"	15'-10"	± 15 ⁵ / ₈ "
10	15'-0"	16'-0"	± 15 ⁷ / ₈ "
11	16'-6"	16'-2"	± 16"
12	18'-0"	16'-4"	± 16 ¹ / ₈ "
13	19'-6"	16'-6"	± 16 ³ / ₈ "
14	21'-0"	16'-8"	± 16 ¹ / ₂ "


PLACE BOTTOM ROW OF BLOCKS ACCORDING TO MINIMUM RADIUS REQUIREMENTS

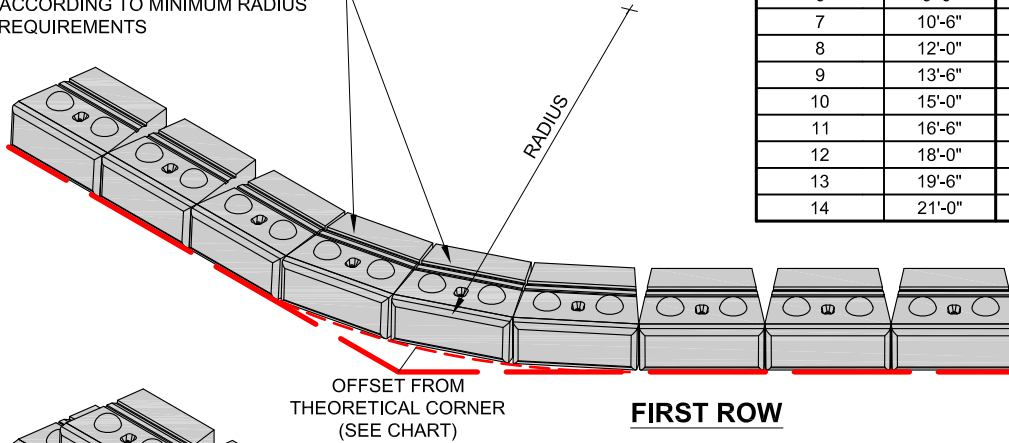

ROTATE BLOCKS AND MOVE FORWARD TO FULLY ENGAGE BOTH KNOBS BELOW (TYPICAL)

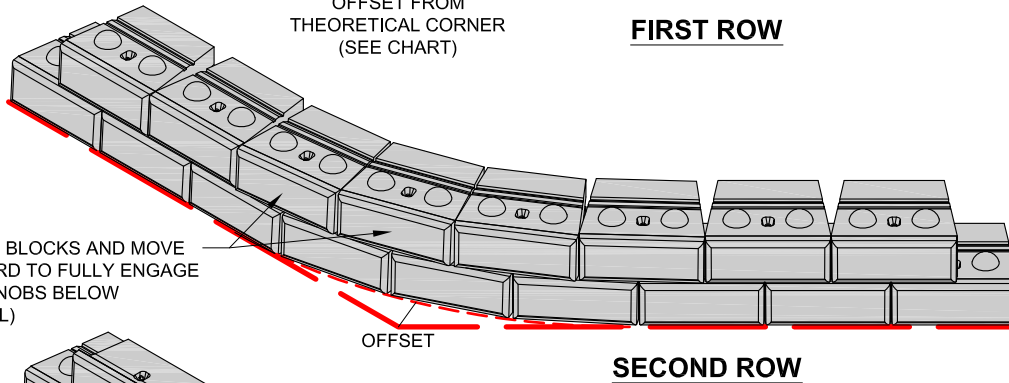

RUNNING BOND SHIFTS ±1 ¹/₄" FURTHER WITH EVERY ROW

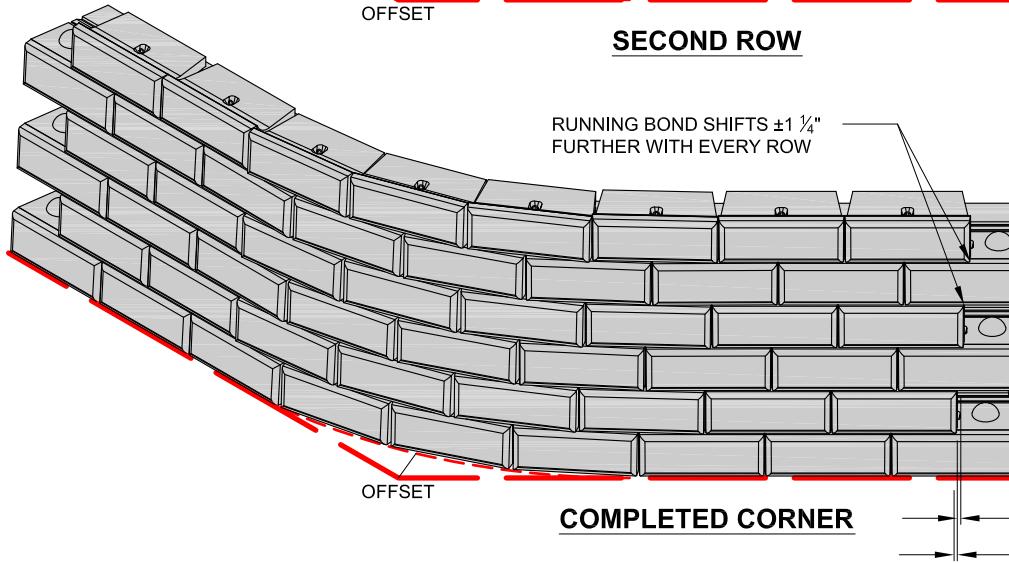

DRAWN BY: JRJ
 APPROVED BY: JRJ
 DATE: 06-22-2015
 SHEET: 1 of 1

TITLE: 45° Outside Corner Radial Solution
 FILE: 12 Outside Corner Radial Solution 062215.dwg

REDI*ROCK®
 05481 US 31 SOUTH, CHARLEVOIX, MI 49720
 (866) 222-8400 ext 3010 • engineering@redi-rock.com
 www.redi-rock.com