



Freestanding Variable Radius Curve

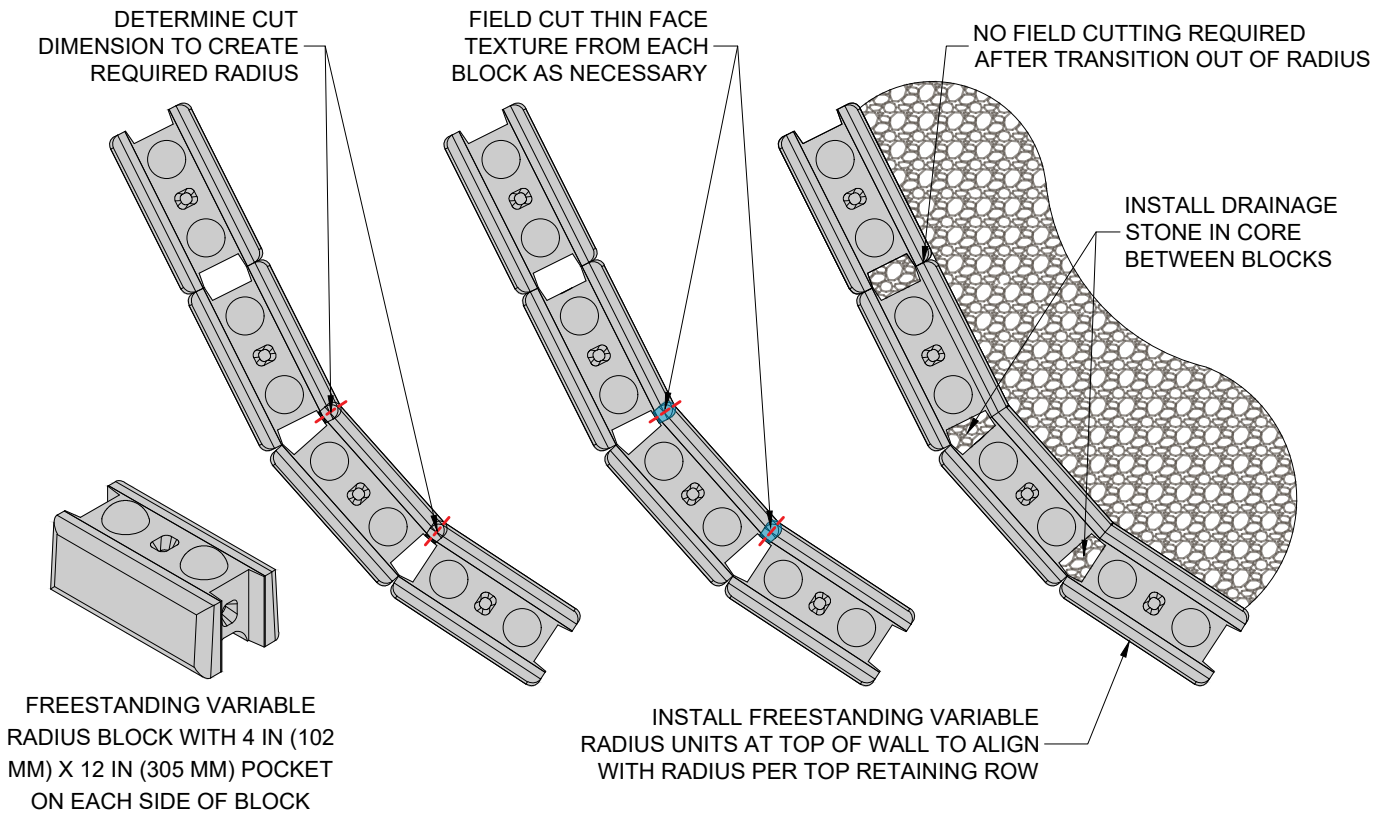

NOTE: LAYOUT OF CONVEX CURVE SHOWN. FOR CONCAVE CURVES, BLOCKS WILL BE CUT AT THE WALL FACE.

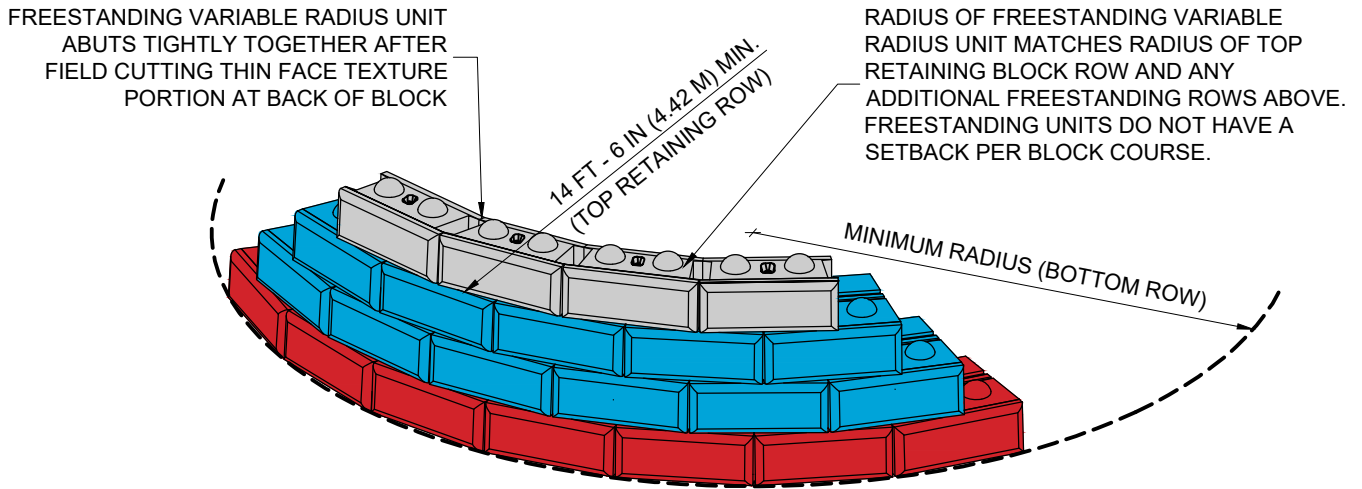

NOTE: 14 FT - 6 IN (4.42M) MINIMUM RADIUS OF TOP RETAINING ROW APPLIES TO 5 DEGREE BLOCK SETBACK. REFER TO RADIAL CORNERS GRAVITY LAYOUT DETAIL FOR ADDITIONAL MINIMUM RADIUS INFORMATION.

This drawing is for reference only. Determination of the suitability and/or manner of use of any details contained in this document is the sole responsibility of the design engineer of record. Final project designs, including all construction details, shall be prepared by a licensed professional engineer using the actual conditions of the proposed site.

DRAWN BY:	LBH
APPROVED BY:	DC
DATE:	09/07/2023
SHEET:	1 of 1

TITLE:	FREESTANDING VARIABLE RADIUS CURVE DETAIL
FILE:	Freestanding_Variable_Radius_Curve.dwg

REDI-ROCK

3890 CHARLEVOIX AVE., PETOSKEY, MI 49720
 (866) 222-8400 ext 33010 • engineering@redi-rock.com
www.redi-rock.com