

MINIMUM SIDE WALL LENGTH WITHOUT CUTTING BLOCKS

- 60 IN (1524 mm) x 20 IN (508 mm) RETAINING BLOCK
- 48 IN (1219 mm) x 20 IN (508 mm) RETAINING BLOCK
- 60 IN (1524 mm) x 20 IN (508 mm) RETAINING BLOCK
- 36 IN (914 mm) x 20 IN (508 mm) RETAINING BLOCK


CORNER BLOCKS

- 50 1/2 IN (1280 mm) x 25 1/2 IN (650 mm) FREESTANDING BLOCK
- 35 1/4 IN (895 mm) x 24 1/4 IN (615 mm) FREESTANDING BLOCK
- 46 IN (1170 mm) x 21 IN (530 mm) FREESTANDING BLOCK
- 42 3/4 IN (1090 mm) x 19 3/4 IN (500 mm) FREESTANDING BLOCK


OUTSIDE 90° CORNER CONFIGURATION FOR VERTICAL WALL END

NOTE: PATTERN SHOWN MINIMIZES THE REQUIREMENT FOR CUTTING BLOCKS TO FIT TO VERTICAL CONSTRAINTS ON EITHER SIDE OF CORNER, AND FOR DOUBLE OUTSIDE 90° CORNERS, PROVIDED CORNER IS SPACED FROM END AT AN EVEN ONE-FOOT (305 mm) INCREMENT AND WALL IS STRAIGHT. CUTTING OF BLOCKS TO FIT WILL BE REQUIRED FOR OTHER SCENARIOS. APPLICABLE TO WALLS UP TO 4 FEET TALL (PLUS CAP).

EXAMPLE APPLICATIONS:

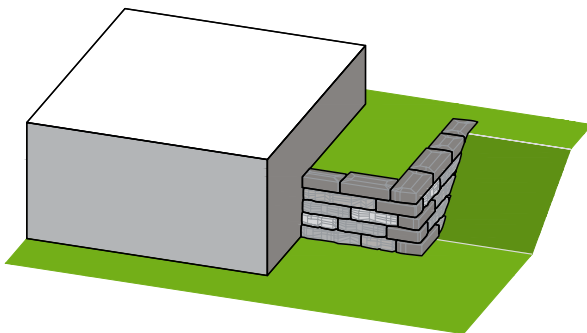

VERTICAL END ABUTTING STRUCTURE

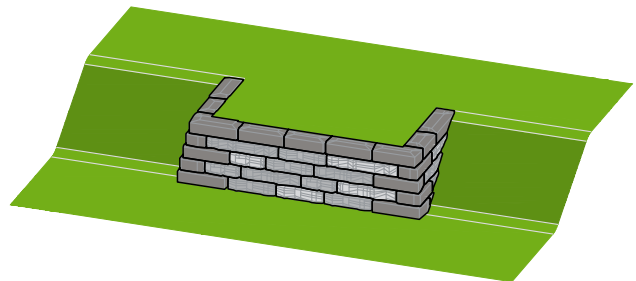

DOUBLE OUTSIDE CORNER

DRAWN BY:
L. HELBLING

APPROVED BY:
L. HELBLING

DATE:
JULY 10, 2023

SHEET NO.:
1 of 1

TITLE:

GRAND LEDGE ALIGNED CORNERS

DRAWING FILE:
Grand Ledge_aligned corner_07102023.dwg

ROSETTA
HARDSCAPES, LLC
3890 CHARLEVOIX AVENUE, PETOSKEY, MI 49770
844-367-9763 • www.rosettahardscapes.com