


GRADE TO DRAIN AWAY FROM WALL  
AND PREVENT SURFACE PONDING  
(TYPICAL, TOP AND BOTTOM OF WALL)

MOVE BLOCKS FORWARD DURING  
INSTALLATION TO ENGAGE SHEAR HEELS

Wall Batter = 14.0°  
(3 in (76 mm) Horizontal in  
12 in (305 mm) Vertical)

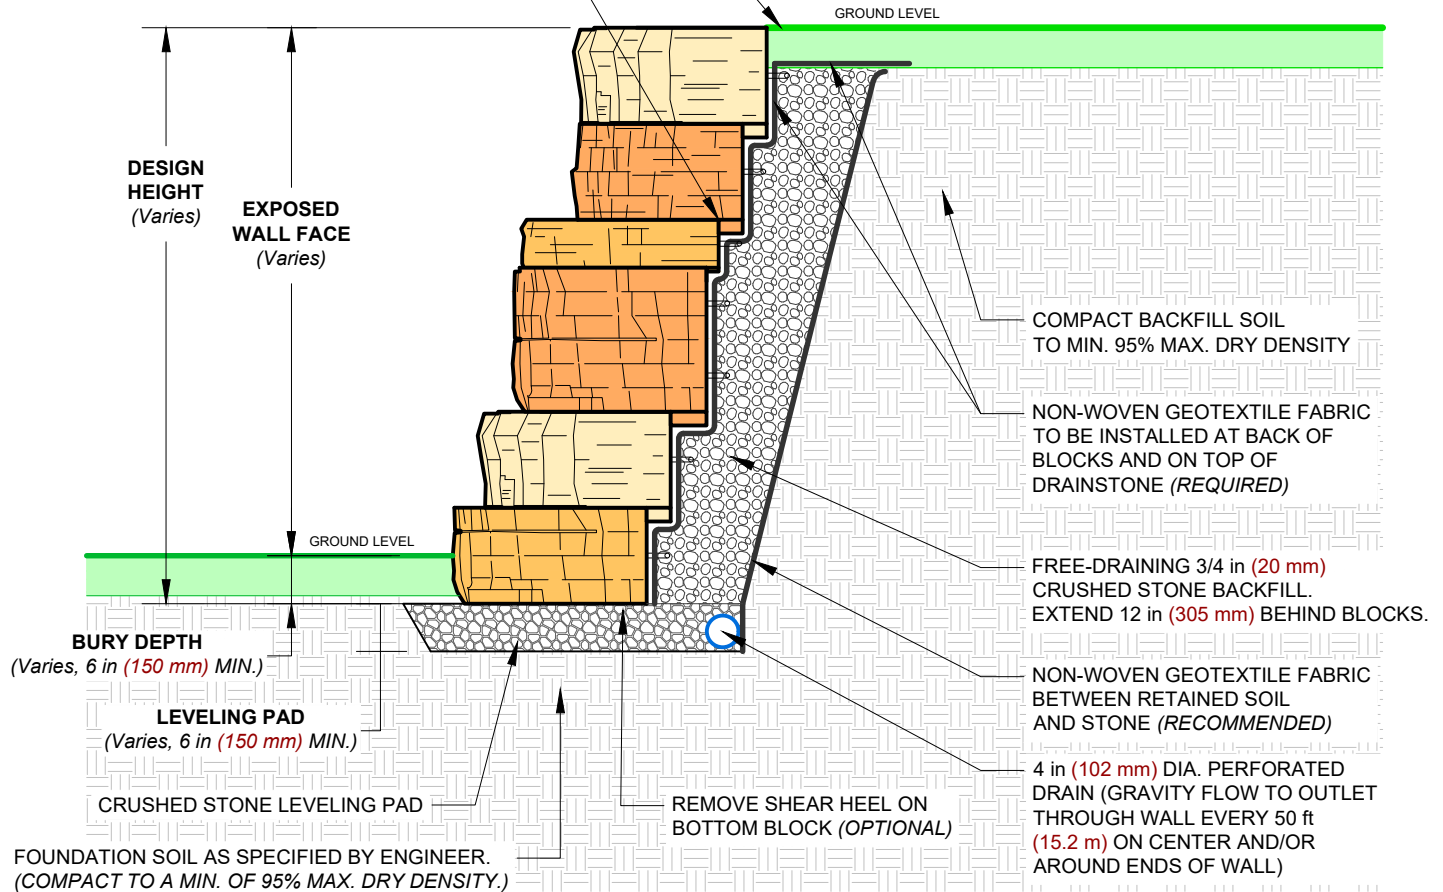

- Block sizes and placement shown are for reference only. Individual Rosetta blocks will vary with installation pattern.
- This drawing is for reference only.
- **Final designs for construction must be prepared by a registered Professional Engineer** using the actual conditions of the proposed site.
- **Final wall design must address both internal and external drainage and shall be evaluated by the Professional Engineer who is responsible for the wall design.**

**TYPICAL SECTION**  
(NO SCALE)

DRAWN BY:  
J. Johnson/EGS

APPROVED BY:  
DJC

DATE:  
26-JUN-2025

SHEET NO.:  
1 of 1

TITLE:

**TYPICAL NON-REINFORCED (GRAVITY)  
WALL SECTION**

DRAWING FILE:  
Gravity Wall - Typical Section 26JUN2025.dwg

**ROSETTA**  
**HARDSCAPES, LLC**

8212 M-119 HARBOR SPRINGS, MI 49740  
877-777-6558 • www.rosettahardscapes.com