


TYPICAL FENCE OR RAILING CONNECTIONS TO ROSETTA OUTCROPPING BLOCKS


CONNECTION OPTION #1
CORE THROUGH OUTCROPPING
BLOCKS AT DESIRED POST LOCATIONS
AND GROUT POSTS IN PLACE
POSTS CAN BE INSTALLED AS DEEP AS
NEEDED TO PROVIDE SUFFICIENT
WEIGHT TO RESIST OVERTURNING
FORCES ON RAILING

CONNECTION OPTION #2
CONNECT MOUNTING FLANGE TO
TOP BLOCK WITH EXPANSION
ANCHOR BOLTS
WEIGHT OF TOP BLOCK IS
AVAILABLE TO RESIST
OVERTURNING FORCES ON RAILING

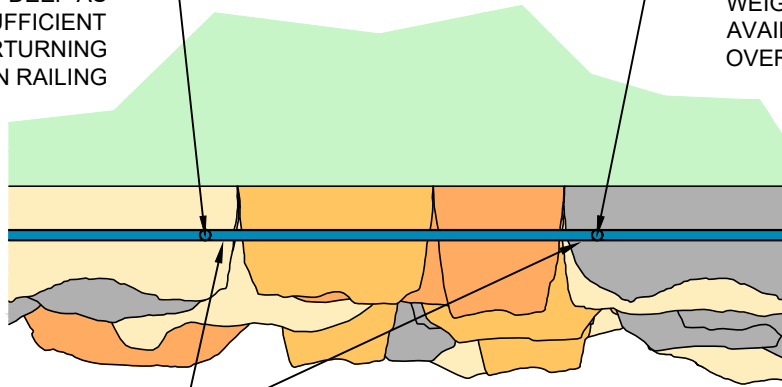


MAINTAIN COVER AS NEEDED FROM ALL
EDGES OF BLOCK (4 in (102 mm) MIN.)
(TYPICAL, ALL CONNECTIONS)

TOP VIEW
(NO SCALE)

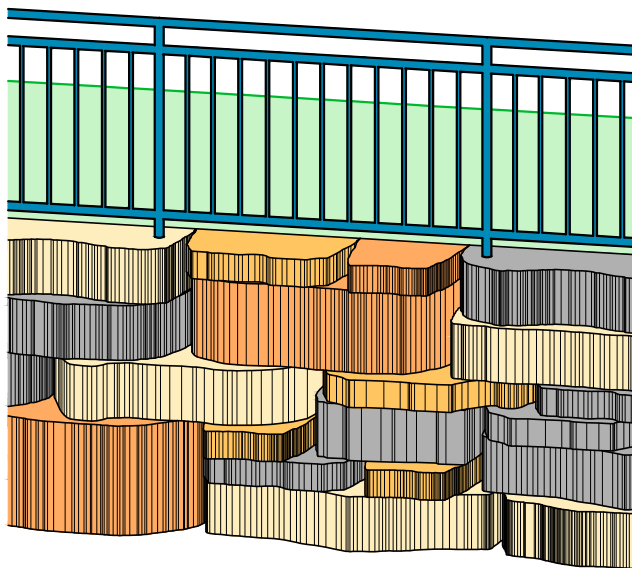

FRONT VIEW
(NO SCALE)

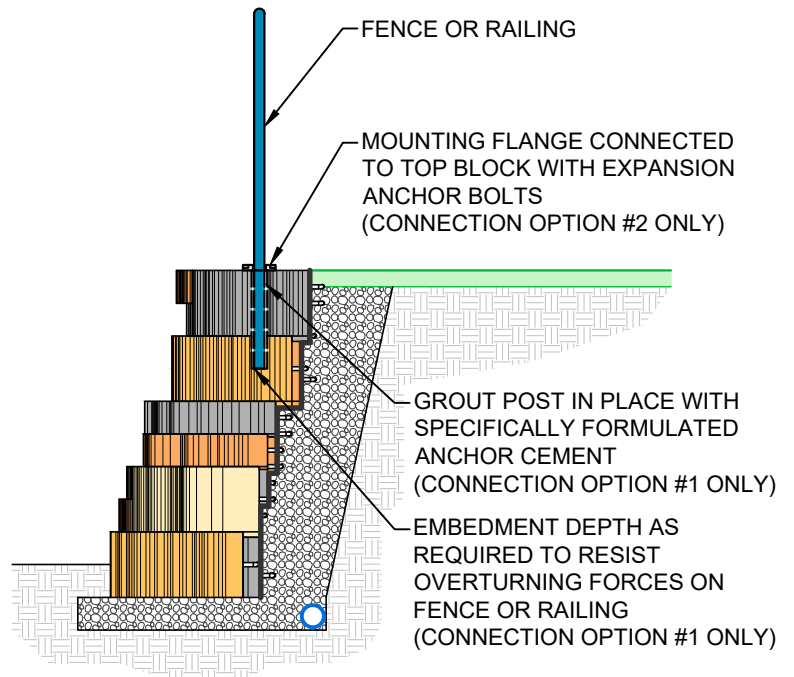

SIDE VIEW
(NO SCALE)

DRAWN BY:
J. Johnson/MRV

APPROVED BY:

DATE:
15-JUL-2025

SHEET NO. :
1 of 1

TITLE:

TYPICAL FENCE OR RAILING CONNECTIONS
TO ROSETTA OUTCROPPING WALLS

DRAWING FILE:
Railing - Typical Installation.dwg

ROSETTA
HARDSCAPES, LLC

8212 M-119 HARBOR SPRINGS, MI 49740
877-777-6558 • WWW.ROSETTAHARDSCAPES.COM